

SUPPLEMENT



New
Color
List

LONGMAN

AND MARTINEZ

PURE PAINTS.

TO BE PREPARED
FOR
IMMEDIATE USE.
NEW YORK

FOR TWO COAT WORK. First Coat.—Mix one-half gallon Oil to one gallon Paint. Second Coat.—Mix three-quarter' gallon Oil to one gallon Paint.

FOR THREE COAT WORK. First and Third Coat.—Mix one gallon Oil to one gallon Paint. Second Coat.—Mix one half-gallon Oil to one gallon Paint.

Average Cost of a Gallon of Paint is less than \$1.25.

CAUTION!

When contracting for painting DO NOT ALLOW any paint to be made or selected for you. Always specify the paint you wish used.



FOR SALE BY

**W. H. SMITH & CO.,
Norwalk, Ct.**

COPYRIGHT 1891 — 6-1-93-

PRICE 50 CENTS

*To the Consumers of our Pure Prepared Paints.
Any Building that is not satisfactorily painted with
 our Pure Prepared Paint, or upon which its use
 has not cost less than if other paint had been used
 will be re-painted at our expense.*

*This Guarantee of satisfactory result, assuring
 the highest degree of excellence in the finished work,
 and at less cost than if done with inferior paint,
 is an agreement which we authorize every dealer
 who has the sale of our paint, to fulfill, and to use
 for such purpose the funds which he has belonging
 to our firm.*

Longman & Martinez.

Die Berechnung der Bedeckungs-Capacität

unserer Farben beruht auf dem Ergebniß wirklicher Proben, welches sich als richtig erweist, da nämlich 1 Gallone unserer präparirten flüssigen Farbe, wie sie aus der Blechanne herausgenommen wird, bei einem zweimaligen Anstrich 250 Quadratfuß Holzfläche bedeckt, und im Falle die angestrichene Oberfläche gewissen Bedingungen entspricht, wird eine Gallone sogar unter Umständen 275 Quadratfuß Holzfläche bedecken. Um nun die erforderliche Quantität Farbe für eine angustreichende Oberfläche zu berechnen, addire man die Anzahl der Fuß von der Breite, der Vorder- und Hinterseite zu der Anzahl der Fuß von der Länge des Gebäudes (beide Seiten); multiplicire die sich heranstellende Anzahl mit der durchschnittlichen Anzahl Fuß, die die Höhe enthält und dividire bei zwei Anstrichen mit 250, und bei nur einem Anstrich mit 500 in das sich nach dieser Berechnung ergebende Resultat.

Beispiel:

Vorderseite	25 Fuß.
Hinterseite	25 "
Seite	36 "
Seite	36 "
	—
Höhe	122) multiplicire
	23)

250 : 2806 = 11¼ Gallone für zwei Anstriche

The Estimate of the Covering Capacity.

One gallon of our Pure Prepared Paint, when mixed with Linseed Oil for use, and as so mixed, will cover 250 square feet of surface, two coats; and under certain conditions of the surface to be covered, this estimate will be exceeded—one gallon covering 275 square feet and over, two coats.

To estimate the amount of Paint required for a desired surface, add the number of feet of width of front and rear to the number of feet of length of building (both sides); multiply by the average height and divide by 250 for two coats, 500 for one coat.

EXAMPLE.

Front,	25 feet,
Rear,	25 "
Side,	36 "
Side,	36 "

Height, 23 } Multiply.

250] 2806 [11¼ gals. for Two Coats.

*To the Consumers of our Fine Prepared Paints.
My Building has so not satisfactorily painted, with*

Digitized by



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL

www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

Jablonski Building Conservation
www.jbconservation.com



capacity.
ed Paint, and as
surface, of the
will be ex-
uare feet
required
er of feet
number of
les); mul-
divide by

122 } multiply
23 }

250 : 2806 = 11 1/4 Gallone für zwei Anstriche

122 } Multiply.
23 } Height, 23
250 : 2806 [11 1/4 gals. for Two Coats.

Die
unfer
welches
getraht
genom
fuß. So
flach ge
unter li
die erfo
flache g
breite,
der Län
geran
die die
und bei
Berechn

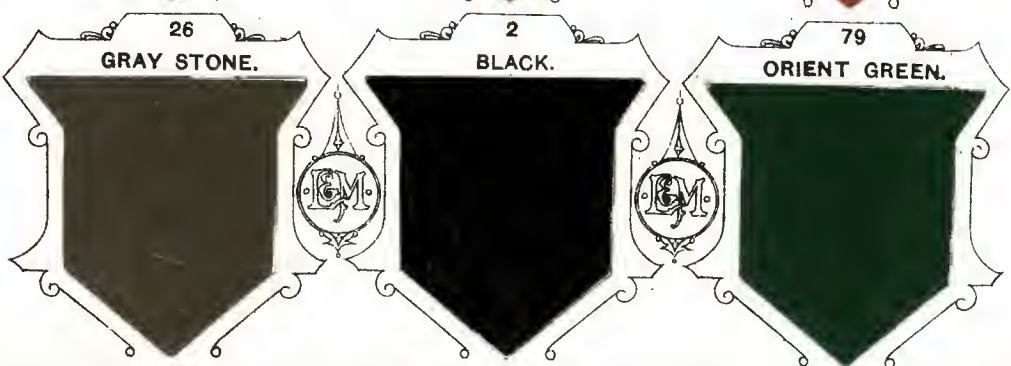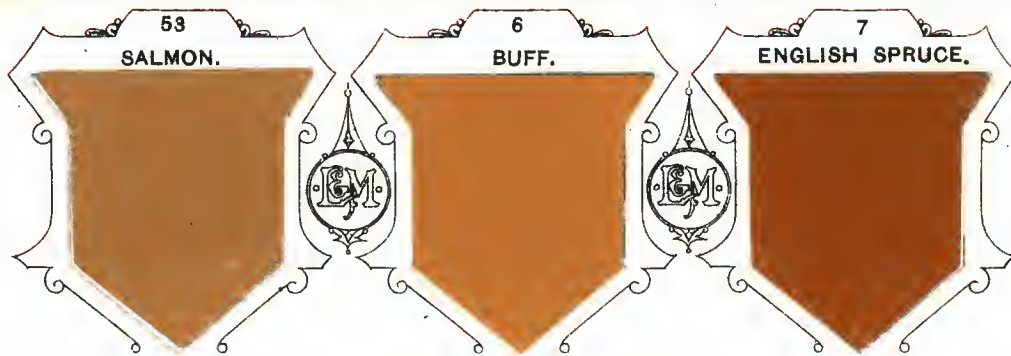

Supp



WH

ING



Pack

ONE E
ONE Q
ONE L
AD
ONE G
CA



FIVE, TEN

TWENTY

KE

Forty Gall
NO CH
PACK

ment.



TE
R
DE
WORK

TH,
ARTER,
ALF,
LLON
S.
FIFTEEN
ALLON
S
Barrels.
ARGE
GES.

